

The Psi Swarm: A low-cost robotics platform and its use in an education setting

James Hilder, Alexander Horsfield, Alan G. Millard, and Jon Timmis

York Robotics Laboratory
University of York, Heslington, YO10 5DD, UK
james.hilder@york.ac.uk
WWW home page: <http://www.york.ac.uk/robot-lab>

Abstract. The paper introduces the Psi Swarm robot, a platform developed to allow both affordable research in swarm robotics and versatility for teaching programming and robotics concepts. Motivated by the goals of reducing cost and construction complexity of existing swarm robotics platforms, we have developed a trackable, sensor-rich and expandable platform which needs only a computer with internet browser and no additional software to program. This paper outlines the design of the platform and the development of a tablet-computer based programming environment for the robot, intended to teach primary school aged children programming concepts.

Keywords: Swarm robotics, Educational robotics, Teaching, Android

1 Introduction

Simple robotic platforms are ideal tools for teaching a wide range of science and engineering disciplines, encompassing electronics, embedded programming, control theory, signal processing and energy management. When the scope of the individual robot is expanded to allow communication and interaction with other similar robots, their potential value as a tool for research expands to allow investigation of swarm intelligence: the study of complex swarm behaviours and emergent behaviours. It was desired to have a robotic platform flexible enough to allow the tuition of core robotic disciplines to a wide range of age groups, whilst being scalable enough to permit large swarm research to also take place. Such platforms often come at a cost which is prohibitive to education and research, both in pure monetary terms, and also in the context of the time needed to learn how to use and program a system, and regarding general maintenance such as recharging and repairing.

Whilst a wide variety of low-cost robotic platforms are available to purchase, only a limited number of these have been designed with swarm robotics in mind, many of which are described in Table 1. For most swarm experiments the robots need to be able to detect, identify and communicate with each other. Ease-of-use is also of significant importance: the robots should be easy to recharge and program. Most of these platforms cost several-hundred GBP per unit; this can

make their use for research, and especially as an educational tool, prohibitive, particularly in the context of a swarm of tens- to hundreds- of robots. Additionally, there is an inevitable compromise to be made in such systems between cost, processing capability and complexity of use.

Platform	Description
 <p>e-puck</p>	<p>The e-puck, a small 2-wheeled robot developed at EPFL [7] with simulator models for use with most swarm-based simulation systems including Webots, V-REP and Player-Stage. The retail price of a e-puck is around £650¹. Extensions including a Gumstix-board and a Linux development board have been developed for the E-Puck [5]: these are powerful for research but the cost and complexity of the tool-chain needed to program it present an obstacle to its use as a teaching platform.</p>
 <p>Khepera</p> <p><small>Source: k-team.com</small></p>	<p>The Khepera series of robots developed by K-Team are highly successful platforms that mix a reliable, sensor-rich base with a compact size and extensive simulator support. Whilst they have been promoted and used as a teaching platform [2], their high retail cost (in excess of £2000 for a single Khepera III model) prohibit their use for swarm research in many establishments.</p>
 <p>Jasmine</p> <p><small>Source: swarmrobot.org</small></p>	<p>The Jasmine is a small (approx. 3cm cube), low cost (around 100 Euro for components) open-source robot designed for large scale swarm experiments using infrared communication [4]. The low-cost and small size make it an attractive prospect for research into lightweight distributed swarm intelligence algorithms on larger swarms, but with limited processing power, communications and environmental sensing.</p>
 <p>Kilobot</p> <p><small>Source: k-team.com</small></p>	<p>The K-Team developed Kilobot is a very low cost platform designed to be scalable up to thousands of platforms. It uses vibrating legs to allow directed motion. The ability to perform mass-reprogramming and large scale charging make it well suited to large swarms. Rubenstein et al claim a raw parts cost of \$14 USD for each platform [11], however the retail cost is far greater².</p>
 <p>Pi Swarm</p>	<p>The Pi Swarm robot, developed at the University of York, adds a sensor-rich expansion to the Pololu 3-Pi line-tracking robot to adapt into into a low-cost, scalable swarm robotics platform. The use of an MBED controller simplifies programming as no tool-chain is needed, but the robot faces compromises from the Pololu 3-Pi base, such as lack of wheel encoding and limited battery life.</p>

Table 1: Alternative Swarm Robotics Platforms

The motivation for this research was to create a new platform to replace a similar robot previously developed by the authors (the Pi Swarm robot [3]) with the goal of reducing cost, improving functionality and specifically enhancing its strengths as a versatile robot for use in a classroom environment.

¹ Price correct at time of writing: 910 CHF plus taxes from official retailers

² For 10 assembled robots is in excess of £1000 in the UK at the time of writing: prices taken from official UK distributor, Rahal Technology, www.rahhalco.co.uk

2 Hardware Design

The Psi Swarm robot is based around a dual-layer 108mm diameter PCB, shown annotated in Figure 1. A pair of 40-pin sockets allow for a MBED LPC1768 rapid prototyping board to be attached, which functions as the main controller for the robot. The MBED is a small module based around an ARM Cortex-M3 microcontroller. One of the core features of the MBED board is it is designed for use with a special set of online compiler tools, which allow for the development of programs from any machine with an internet connection and compatible browser; this eliminates the need for purchasing and installing a specific tool chain¹.

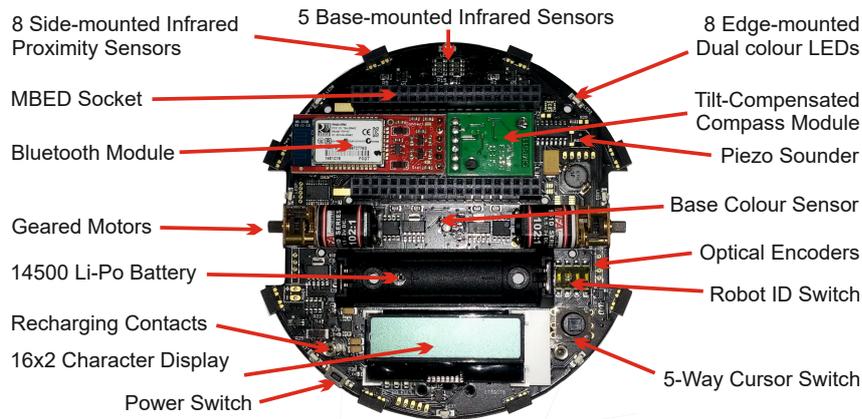


Fig. 1: Photo of the main Psi Swarm PCB with additional modules

2.1 Sensors

The robot features a number of sensors to allow it to sense its environment. A set of 8 infrared (IR) sensors equally spaced around the edge of the robot can be used to detect obstacles and other robots. Based around a Vishay TCRT1000 emitter:phototransistor pair connected to a 10-bit ADC, they can detect white surfaces up to approximately 15cm and estimate the distance to that surface. On the base of the robot there are 5 additional IR sensors that are primarily designed to allow the robot to discriminate between light and dark surfaces allowing for tasks such as line-following.

Provisions are made on the PCB to allow a number of other sensors to be attached. These include the AMS TCS3472x series colour sensors, which can be attached to the base of the robot in a backlit configuration, and also facing up on the robot unlit, allowing the robot to discriminate between different zones of colour either on the arena surface or projected onto the robot from above - the latter configuration allowing dynamically changing arenas to be easily created

¹ Projects created in the online tools can also be exported to a number of different tool-chains designed for ARM microcontrollers, such as Keil μ Vision, IAR Systems and GCC if desired.

for specific experiments. An SRF02 ultrasonic module can attach to the front of the robot, which allows obstacles to be detected between 15cm and 200cm from the robot, as seen in Figure 2a. A socket for a CMPS11 tilt-compensated compass module, which combines a 3-axis gyroscope, 3-axis accelerometer and a dedicated microcontroller to perform the Kalman filtering of raw data to return a compensated bearing is provided. Optical wheel encoders can be attached using special daughterboards which can provide up to 2 degree precision for each wheel. The robot also includes a precision digital temperature sensor, current measurement and voltage measurement. The use of existing modules for many of the sensors helps to simplify construction, minimise processing overheads and reduce costs as only the required modules need to be attached.

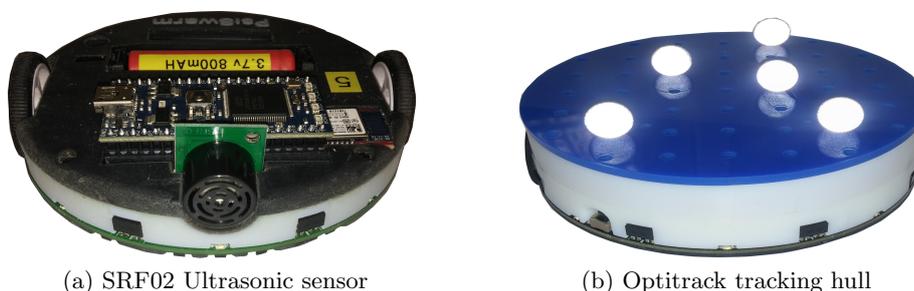


Fig. 2: Different setup arrangements and plastic hulls for the Psi Swarm

2.2 Actuators

The drive for the robot is provided by a pair of micro-metal geared motors attached to 32mm diameter wheels with rubber tyres. Different gearboxes are available, with 102:1 being the default ratio, which provides a top speed of approximately $0.25ms^{-1}$ and represents a useful balance of speed and torque based on the size of the robot and intended environments. The motors each have dedicated regulated power supplies and are driven by PWM control using H-Bridge drivers, ensuring that speed remains constant as the battery discharges.

The robot also has a 16×2 character display which is useful for providing user feedback when testing algorithms, a set of 8 dual-colour LEDs around the perimeter of the robot, a high-brightness dual-colour LED in the center of the robot facing upwards and a pair of white LEDs on the robot to provide back-lighting for the colour sensor². A small piezo sounder attached to a PIC microcontroller allows for simple tunes and other sounds to be generated. A 5-direction cursor switch can be used for user input, and a 4-way DIL switch is provided to allow a robot ID to be set in hardware³.

² The MBED controller also has a set of 4 user-programmable LEDs

³ This allows swarms of up to 15 to be simply set in hardware; larger swarms can be created by using the on-board EEPROM to store additional bits of index information

2.3 Power

The robot is powered using a single 14500-sized Lithium Polymer cell. These cells, similar in size to AA cells, typically provide 800mAH of charge at 3.7V nominal voltage. The battery supplies power to a number of voltage regulation circuits to separate supplies for the motors, sensors and the MBED. Unless low-power states are used, the MBED will typically draw 250mA at 5V, as such the battery life for the robot varies between approximate 30 minutes at full-load ⁴ to approximately 120 minutes at idle.

One of the design goals for the robot was to allow for long-term swarm experiments to be run. To achieve this goal, the robots contain a recharging circuit which allows the battery to be charged and the robot to remain powered when a 6V DC supply is provided to two contacts on the base of the robot. This supply is rectified such that the polarity is not important. Utilising this design, it is possible to create arenas for the robots that either use bus-strips (as seen in Figure 3) or chequerboard arrangements of power pads on the surface that allow the robot to recharge.

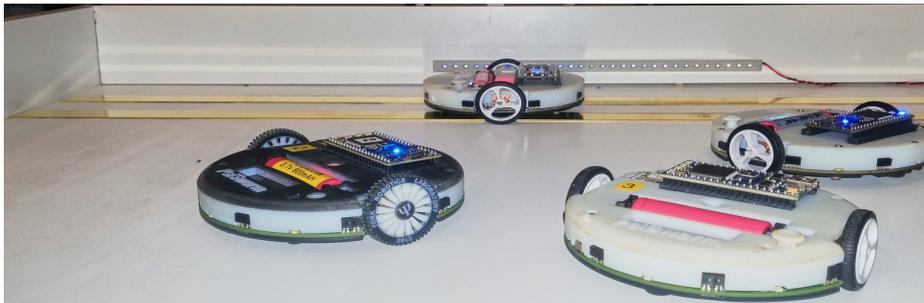


Fig. 3: A swarm of Psi Swarm robots on a charging table with IR beacon

2.4 Construction

A set of 3D-printed parts form a sandwich around the main PCB, protected the components and providing a reflective surface to allow robots to sense other robots. On the base of the robot, a pair of ball-bearings minimise wobble whilst allowing the robot to negotiate uneven surfaces. Various shells have been designed to allow different sensor configurations and tracking systems to be accommodated, including AprilTags [8] and the Optitrack system [6] as seen in Figure 2b.

3 Software Design

The API for the platform is written in C++ and is designed for use with the MBED online compiler. Functions to simplify interaction with all the available

⁴ Full load considered to be all LEDs on, IR sensors active at 10Hz, Bluetooth active and motors at 100% on a smooth surface

sensors and actuators are written. The API includes a built-in demonstration mode, in which various testing routines and simple code-demos can be activated through a menu-based system when the robot is turned on. A simulator model for the robot using the Argos simulation package is currently in development [9].

A special set of functions has been developed which works in conjunction with a special IR beacon (seen in Figure 3) that emits 25mS pulses of light at 4Hz. Swarms of robots can synchronise with this beacon, and based on relative sensor strength estimate the heading of the beacon. The robots then use an ID-based TDMA system to ensure that only one robot is emitting IR at any one time. Using this system it is possible for swarms of up to 15 robots to can approximate range and bearing measurements for every other robot within line of sight.

3.1 Communication

The robot has two different RF-based communication modules available. A BlueSMIRF Bluetooth to RS-232 module can be attached which allows simple interaction between the robots and a host computer or other device. Inter-swarm communication is possible using the Bluetooth interface, most easily implemented using a computer as a router. Alternatively, a 433MHz transceiver can be attached, which allows for low bitrate communications between robots or a special modem, using code previously developed for the Pi Swarm robot. The API includes functions that allow instructions to be sent to the robots using either communication interface. The functions allow sensor data to be communicated between robots and a computer and allow remote control of the robot hardware. The API also includes functionality to allow file-handling of the flash memory on the MBED using the Bluetooth interface; it is possible to send updated controller binaries to multiple robots at once using this method, which allows large swarms to be reprogrammed wirelessly.

4 Case Study: The Psi Swarm as an Education Platform

As of September 2014, there has been a dramatic change in the English national curriculum, shifting the focus from Information, Communication and Technology (ICT) to Computing. Where previously teaching has been focussed on office based skills such as Microsoft PowerPoint and Access, they will now be educated in programming skills and fundamentals such as algorithm design and logical flow [1]. Teachers are being encouraged to experiment with different possible teaching methods and materials to aid in the choice of a more standardised approach. To take advantage of this renewed interest in computing, we have developed an application that can educate primary school students in programming and logical flow through the control of a Psi Swarm robot using a Android based tablet.

4.1 Background

We have focussed on Key Stage 2 (pupils aged 7 to 11) and the following 4 learning goals outlined in the curriculum:

1. Design, write and debug programs that accomplish specific goals, including controlling or simulating physical systems
2. Solve problems by decomposing them into smaller parts
3. Use sequence, selection, and repetition in programs; work with variables and various forms of input and output
4. Use logical reasoning to explain how some simple algorithms work and to detect and correct errors in algorithms and programs

There are a number of existing projects for the education of programming skills, ranging from the older packages such as Logo to more recent examples such as the BBC Micro:Bit. Logo, a LISP based language, developed by MIT in 1967, was designed to allow children to learn to program by controlling the movement of a robot called a Turtle. Scratch, a graphical programming suite that allows the user to define the activity of a program using a set of pre-made building blocks, allows students to learn programming using the concepts of Logo while making interaction more media oriented to make it more appealing [10].

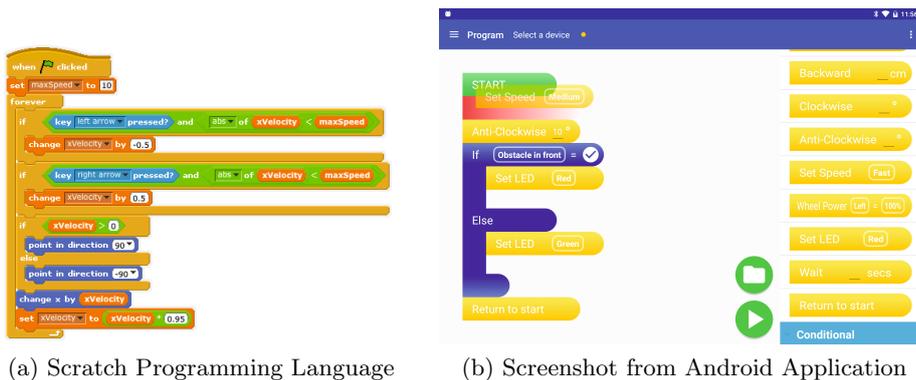


Fig. 4: Screenshot from the Scratch Programming Language and the Android Tablet Application

4.2 Android Application

Based on the basic design concepts of Scratch we have developed an Android-based tablet application that allows students to program the Psi Swarm robot utilising an intuitive drag-and-drop user interface; examples of both are shown in Figure 4. These concepts include the use of colour codes and shaped blocks that have distinct areas to snap together, allowing the students to focus on the function and logic of the code without having to be concerned about syntax. The user generated code can be saved and loaded on the tablet, and multiple

methods to run the code on the robots are implemented. The tablet application can connect with the robot using Bluetooth and send program instructions directly, allowing for the quick testing and step-through debugging of programs. Alternatively, the user code can be sent as a file to the robot and saved to the MBED Flash memory using a compressed format. The robot API includes an interpreter which can then parse these programs without needing the tablet. Test lessons for Year 3 and a Year 6 classes have been designed. The students are given a target course, printed onto an A1 acrylic-sheet, which contains a start location for the robot, a target location and a path they should try to follow. The younger students are instructed to move the robot from the start to the target using combinations of turtle-style commands. The older students are to use conditional statements and sensor data from the line-following IR sensors.

5 Conclusions

This paper has discussed the design and implementation of a low-cost robotics platform, designed with the dual-goals of being suitable for demonstrating programming and robotics principles to a wide-variety of age groups, whilst also being a powerful platform for the research of swarm-robotics. The authors believe the broad array of sensors, simplicity of use and low-cost make the platform a unique prospect for teaching and research. Further information about the Psi Swarm and the education application, including the reference manual, schematics, software API, lesson plans and demonstration videos can be found at www.york.ac.uk/robot-lab/psiswarm.

References

1. National curriculum in England: computing programmes of study.
2. R. M. Harlan and D. B. Levine et al. The khepera robot and the kRobot class. *SIGCSE Bull.*, 33(1), Feb. 2001.
3. J. Hilder and R. Naylor et al. The pi swarm: A low-cost platform for swarm robotics research and education. In *TAROS 2014*, pages 151–162, 2014.
4. S. Kornienko and P. Levi et al. Minimalistic approach towards communication and perception in microrobotic swarms. In *Intelligent Robots and Systems*, Aug 2005.
5. W. Liu and A. Winfield. Open-hardware e-puck linux extension board for experimental swarm robotics research. *Microprocessors and systems*, 35(1):60–67, 2011.
6. A. G. Millard and J. Hilder et al. A low-cost real-time tracking infrastructure for ground-based robot swarms. In *ANTS: 9th Int. Conf. on Swarm Intelligence*, 2014.
7. F. Mondada and M. Bonani et al. The e-puck, a robot designed for education. In *Proc. 9th Conf. on Autonomous Robot Systems and Competitions*, 2009.
8. E. Olson. AprilTag: A robust and flexible visual fiducial system. In *Proc. of the IEEE Int. Conf. on Robotics and Automation (ICRA)*, pages 3400–3407, May 2011.
9. C. Pinciroli and V. Trianni et al. ARGoS: a modular, parallel, multi-engine simulator for multi-robot systems. *Swarm Intelligence*, 6(4):271–295, 2012.
10. M. Resnick and J. Maloney et al. Scratch: Programming for all. *Commun. ACM*, 52(11):60–67, Nov. 2009.
11. M. Rubenstein and C. Ahler et al. Kilobot: A low cost scalable robot system for collective behaviors. In *Int. Conf. on Robotics and Automation*, 2012.

TAROS 2016 Demonstration

We plan to demonstrate the Psi Swarm robot and the tablet based teaching application at TAROS 2016. As the robots and tablets are small and portable we do not require much in the way of extra provision - we will bring a couple of A1-sized example courses, a few robots and tablets for a hands-on demonstration of the system - so approximately 6ft-8ft of bench space would be ideal. Space to display an A0 poster showing some of the technical aspects of the robot would also be desirable.